


METHOD OF TREATING THE COVERSTOCK
OF A BOWLINGBALL TO IMPROVE
PERFORMANCE

Ronald I. Hickland, Jr. et al.
1237-0938

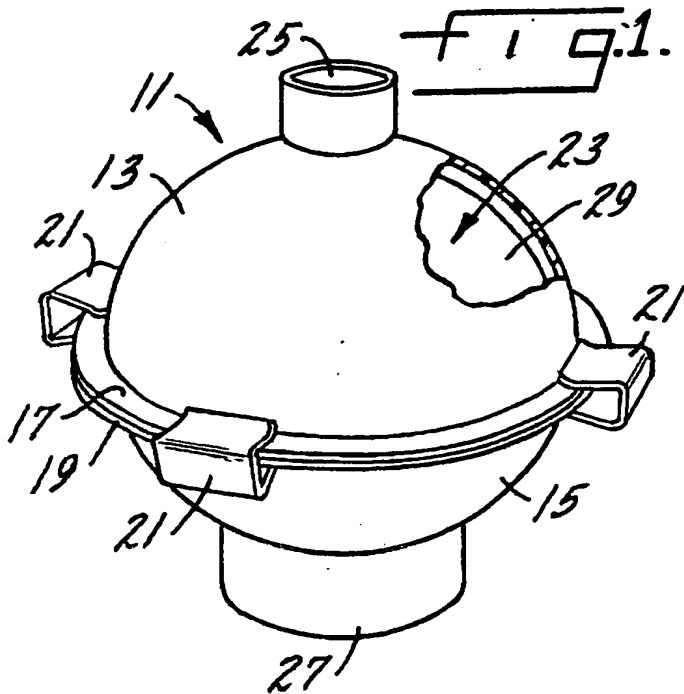

ADD ABSORBENT
AGENT INTO CLAMP-
ED HEMISPHERES
WITH BOWLING
BALL INSIDE

SHAKING CLAMPED
HEMISPHERES TO
COMPRESS AGENT
EVENLY AGAINST
BALL

FIG. 2.

TIME LAPSE TO ALLOW COMPRESSED
ABSORBENT AGENT TO EXTRACT
PLASTICIZERS, OILS, ETC. FROM
COVERSTOCK OF BALL

REMOVING EXTRACTED PLASTICIZERES,
OILS, ETC. FROM CLAMPED HEMI-
SPHERES INTO WASTE CONTAINER

REMOVING BOWLING BALL FROM
HEMISPHERES AND REMOVING
DRIED ABSORBENT FROM
COVERSTOCK OF BALL

+